



CONVEYORS & DRIVES, INC.
Convey your future

STAINLESS STEEL GRAVITY ROLLER CONVEYORS

AquaPruf®




Solid Acetal Rollers

- Frame is constructed of continuous TIG welded 304 stainless steel for durability in tough applications
- 1" high side guiding for product containment or low side guiding for maximum flexibility
- Solid rollers simply lift out of UHMW guiding for quick access to frame during cleaning
- Solid UHMW guides are removable without tools for complete access to frame during cleaning
- Designed to meet USDA Red Meat & Poultry standards



Features & Specifications

- Roller widths: 8", 12", 18", 24", 30" & 36"
- Conveyor lengths: 36" to 120" in 3" increments
- Load capacity: 20 lbs. per roller
- Frame is all welded with solid round cross members
- All frame components are a #4 finish
- Frame features welded standoffs for supports
- Roller centers 3" and 6"
- 2" diameter solid Acetal rollers
- Roller ends are located in a UHMW guide bar
- Stands are stainless steel tube with adjustable foot and thread guards
- Optional welded end stops are available

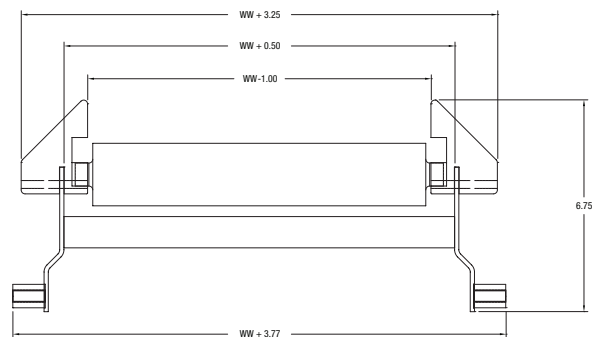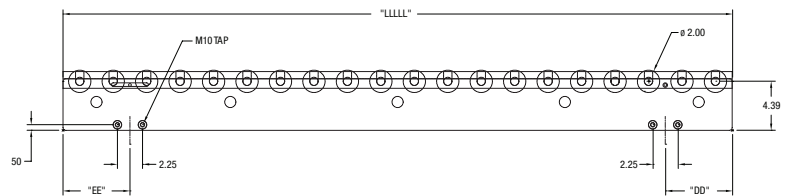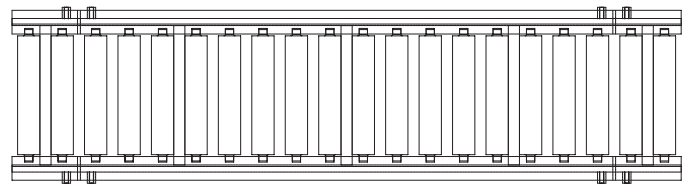

- * Recommended minimum angle of decline is 5 degrees for products greater than 10 lbs.
- * Recommended minimum angle of decline is 7-10 degrees for products less than 5 lbs.
- * Recommended 3 rollers are in contact with the product.